

ZOOMLION



ZOOMLION, VISION CREATES FUTURE

ZOOMLION ANHUI INDUSTRIAL VEHICLE CO.,LTD

ZOOMLION ANHUI INDUSTRIAL VEHICLE CO.,LTD

Add: No.2 Nanwei Road, Area of High-tech Development Zone, Wuhu, Anhui Province, China
Post: 241002 TEL: +86-553-3020328 Website: www.zoomlion.com

All information based at the time of printing and subject to change without notice.
Pictures may be shown with optional equipment. All rights reserved.

ZOOMLION

FB30/35 Technical Data Electric Forklift



Flexible



Powerful



Reliable design



ZOOMLION

ZANI LIFT

JBB ZOOMLION
Contacto: Jacobo García
P.I. Hormilla, Sector B 26323,
Hormilla, La Rioja
M. 609 987 710
info@jbbassets.com

ZANILIFT
Contacto: Nicola Zago
Ctra. N III, Km. 339 46190,
Riba-roja de Túria, Valencia
T. +34 961 667 016 M. 661 79 99 59
info@zanilift.com



Electric Forklift

Electric forklift, flexible and efficient, rated load 3000-3500kg

FB30/35



The roof protection frame is made of special-shaped steel pipes, which have high strength and good sealing performance for the cab.



The entire vehicle is equipped with LED light emitting bodies, which are energy-saving and power-saving. At the same time, the performance and service life of the lamps are greatly improved. The entire vehicle is made of environmentally friendly materials, reducing the harm to the environment.



A newly designed gantry system, with the driver's dashboard lowered, greatly enhances the driver's forward visibility.



The optimized design of the large boarding armrest makes boarding more convenient.





Side charging design, no need to open the hood, convenient and fast.



Integral cast steering axle, with a longer service life; Equipped with a shock absorption system, greatly improving the driver's riding comfort.

Machine 2D Graph

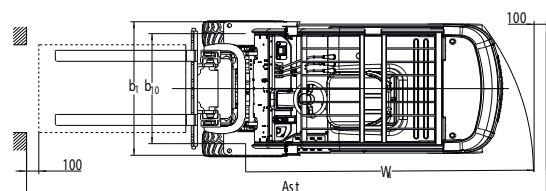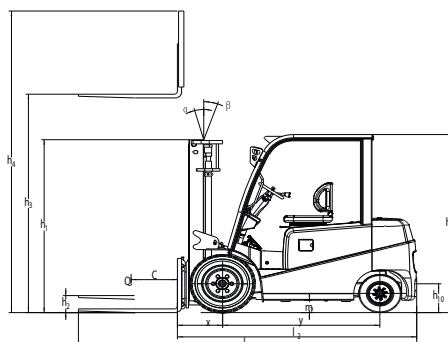

Machine Parameters

FB30/35

Characteristic	Manufacturer	/	ZOOMLION	ZOOMLION
	Manufacturer's type designation	/	FB30	FB35
	Drive	/	Electric	Electric
	Operator type	/	Seated	Seated
	Load Capacity / rated load	Q (kg)	3000	3500
	Load centre distance	C (mm)	500	500
	Load distance,centre of drive axle to fork	x (mm)	490	490
	Wheelbase	y (mm)	1710	1710
Weight	Service weight	kg	/	/
	Axle loading,laden front/rear	kg	/	/
	Axle loading,unladen front/rear	kg	/	/
Tyre	Tyre type	/	Pneumatic/Solid tyre	Pneumatic/Solid tyre
	Tire type, front	/	28*9-15	28*9-15
	Tire type, rear	/	18*7-8	18*7-8
	Wheels,number front rear(x=driven wheels)	/	2x/2	2x/2
	Tread,front	b10 (mm)	1005	1005
	Thread,rear	b11 (mm)	970	970
Size	Tilt of mast/fork carriage forward/backward	°	6/10	6/10
	Height,mast lowered	h1 (mm)	2090	2090
	Free lift	h2 (mm)	150	150
	Lifting height	h3 (mm)	3000	3000
	Height,mast extended	h4 (mm)	4290	4290
	Height of overhead guard(cabin)	h6 (mm)	/	/
	Seat height/stand height	h7 (mm)	/	/
	Overall length	L1 (mm)	3625	3625
	Length to face of forks	L2 (mm)	2555	2555
	Overall width	b1/b2	1220	1220
	Fork dimensions	S/e/l (mm)	1070X125X45	1070X125X50
	Fork carriage DIN 15173,class/type A,B	/	2A	2A
	Fork-carriage width	b3 (mm)	1100	1100
	Ground clearance,laden,below mast	m1 (mm)	/	/
	Ground clearance,centre of wheelbase	m2 (mm)	150	150
	Aisle width for pallets 1000x1200 crossways	Ast1 (mm)	4000	4000
	Aisle width for pallets 800x1200 lengthways	Ast2 (mm)	4200	4200
	Turning radius	Wa (mm)	2300	2300
Performance	Travel speed,laden/unladen	km/h	12/14	12/14
	Lift speed,laden/unladen	mm/s	380/450	350/450
	Lowering speed,laden/unladen	mm/s	500/450	380/230
	Max. drawbar pull,laden/unladen	N	/	/
	Max.gradeability,laden/unladen	%	15/20	15/20
Power	Drive motor rating S2 60 min	kW	13	13
	Lift motor rating at S3 15%	kW	15	15
	Battery voltage,nominal capacity K5	V/Ah	76.8 / 280	76.8 / 280
	Battery weight	kg	230	230
	Battery dimensions l/w/h	cm	/	/
Other	Type of drive control	/	AC	AC
	Operating pressure for attachments	bar	/	/
	Oil valume for attachments	l/min	/	/
	Sound level at the driver's ear acc.to DIN 12053	dB(A)	75	75